

LBX955





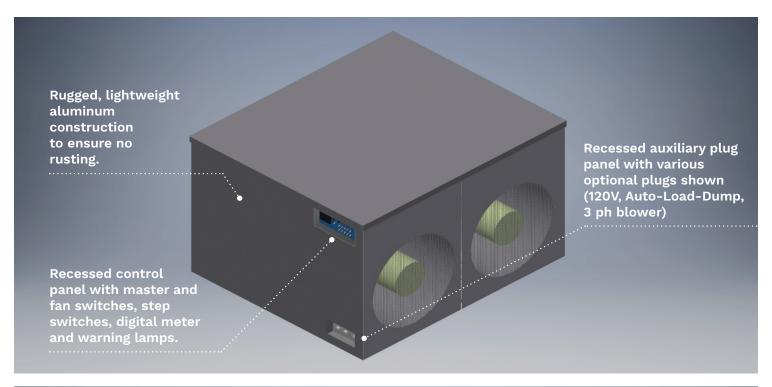

Pittsburgh, PA • USA generalplatinum.com info@generalplatinum.com

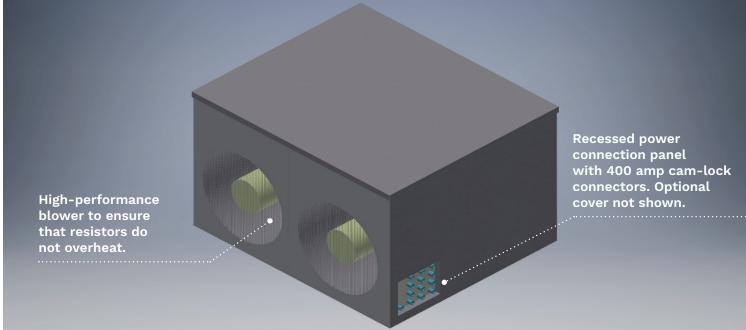

CONSTRUCTION	The structure is all-aluminum to ensure no corrosion. Heavy-duty skeleton frame holds panels and equipment in place.
RESISTORS	The resistors are a stainless steel alloy to ensure long-life and a minimum change in resistance from cold to hot.
SAFETY	Ground terminal is provided. Blower inlet is shielded. Thermal and air pressure cutouts ensure that equipment does not exceed permissible temperatures.
CONNECTIONS	Customer connects the power to the load bank via heavy-duty 400 amp industry-standard connectors. Auxiliary power is provided through a flanged male receptacle. An optional connection is via a serial port to the digital meter to record the test session.
CONTROLS	The controls are in a recessed panel to prevent accidental damage. Master switch turns the unit and the meter display on. A fan switch turns the blower on and enables the load steps. Individual step switches allow power to be added in increments. A "loadenable" switch allows the load to be set first and then instantly loaded to the generator.
OPTIONS	Available options are: 5" casters, lift channels / tie-down points, digital recording capability, auto-load-dump, 120V aux power, 3 ph aux power.
ACCESSORIES	Available accessories are: vinyl transport cover, inlet cover, exhaust cover, controls cover, camlock cover, aux power cover.

PRODUCT	KW	VOLTAGE	STEPS	DIMENSIONS
LBX755-SV	755	480 or 240	5/10/20/40/80/6x100	84x46x54H
LBX755-DV	755	480/240/208	5/10/20/40/80/6x100	
LBX755-MV	755	600/480/240/208	5/10/20/40/80/6x100	
LBX955-SV	955	480 or 240	5/10/20/40/80/8x100	63x74x48H
LBX955-SV	955	480/240/208	5/10/20/40/80/8x100	
LBX955-MV	955	600/480/240/208	5/10/20/40/80/8x100	
LBX1155-SV	1155	480 or 240	5/10/20/40/80/10x100	78x84x52H
LBX1155-DV	1155	480/240/208	5/10/20/40/80/10x100	
LBX1155-MV	1155	600/480/240/208	5/10/20/40/80/10x100	



Pittsburgh, PA • USA generalplatinum.com info@generalplatinum.com

